

**DOMINANDO
EL TERRITORIO**

**DOMINANDO
EL TERRITORIO**



DISTRIBUIDOR AUTORIZADO

 **SEBA**
S A B E D E L L A N T A S
ECONOMY PLUS⁺

 **SEBA**
S A B E D E L L A N T A S
ECONOMY PLUS⁺

BIAS TRACTOR REAR TYRES



ECONOMY PLUS⁺



R-1

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
4.00-12 TT	4	535	112	3.00D	240	280
5.00-12 TT	6	590	145	4.00E	200	280
6.00-12 TT	6	635	152	4.50E	250	405
6.00-14 TT	8	690	165	4.50E	250	600
6.00-16 TT	8	690	165	4.50E	250	495
6.50-16 TT	8	765	180	4.50E	250	565
7.50-16 TT	8	810	205	5.50F	210	650
7.50-20 TT	8	910	205	5.50F	240	760
8.3-16 TT	6	790	211	W7	230	695
8.3-20 TT	10	788	211	W7	240	695
8.3-24 TT	6	993	211	W7	240	810
9.5-20 TT	8	950	240	W8	210	955
9.5-24 TT	6	1048	241	W8	210	940
11.2-24 TT	8	1103	284	W10	250	1150
11.2-24 TL	8	1103	284	W10	250	1150
11.2-28 TT	6	1205	284	W10	180	1000
11.2-28 TT	8	1205	284	W10	250	1180
11.2-38 TT	6	1459	284	W10	180	1150
11.2-38 TL	8	1459	284	W10	250	1320
12.4-24 TT	8	1159	315	W11	220	1285
12.4-24 TT	12	1159	315	W11	330	1600
12.4-28 TT	8	1260	315	W11	170	1400
12.4-28 TT	12	1260	315	W11	330	1650
12.4-36 TT	8	1464	315	W11	220	1500
12.4-36 TT	12	1464	315	W11	330	1850
12.4-38 TT	8	1514	315	W11	220	1600
12.4-38 TT	12	1514	315	W11	320	1850
13.6-24 TT	8	1210	345	W12	190	1400
13.6-24 TT	12	1210	345	W12	260	1600
13.6-28 TT	8	1311	345	W12	210	1645
13.6-28 TT	12	1311	345	W12	250	1900
13.6-38 TT	8	1565	345	W12	210	1750
13.6-38 TT	12	1565	345	W12	260	2000
14.9-24 TT	8	1265	378	W13	180	1600



SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
14.9-24 TT	12	1265	378	W13	260	2000
14.9-24 TL	8	1265	378	W13	180	1600
14.9-26 TT	8	1316	378	W13	190	1950
14.9-26 TT	12	1316	378	W13	260	2060
14.9-28 TT	8	1367	378	W13	180	1700
14.9-28 TT	12	1367	378	W13	250	1950
15.5-38 TT	10	1569	394	W14L	220	2000
15.5-38 TT	12	1569	394	W14L	260	2120
16.9-24 TT	10	1333	429	W15L	170	1850
16.9-24 TT	12	1333	429	W15L	230	2120
16.9-28 TT	10	1435	429	W15L	190	2120
16.9-28 TT	12	1435	429	W15L	230	2360
16.9-30 TT	10	1485	429	W15L	190	2240
16.9-30 TT	12	1485	429	W15L	230	2500
16.9-34 TT	10	1587	429	W15L	190	2360
16.9-34 TT	12	1587	429	W15L	230	2575
18.4-26 TT	12	1450	467	DW16	220	2650
18.4-26 TT	14	1450	467	DW16	250	2800
18.4-30 TT	10	1552	467	W16L	180	2500
18.4-30 TT	12	1552	467	W16L	220	2900
18.4-34 TT	10	1654	467	W16L	180	2725
18.4-34 TT	12	1654	467	W16L	220	3000
18.4-38 TT	10	1755	467	W16L	180	2900
18.4-38 TT	12	1755	467	W16L	220	3250
18.4-42 TT	10	1857	467	W16L	180	3000
18.4-42 TT	12	1857	467	W16L	220	3350
20.8-28 TT	10	1834	528	W18L	150	3150
20.8-38 TT	12	1834	528	W18L	190	3550
23.1-26 TT	12	1605	587	DW20	170	3250
23.1-26 TT	16	1605	587	DW20	220	3750
23.1-30 TT	12	1707	587	DW20	170	3450
23.1-30 TT	16	1707	587	DW20	225	4000
24.5-32 TT	12	1803	622	DW21A	170	4000
24.5-32 TT	16	1803	622	DW21A	210	4500



R-1 IRRIGATION DRIVE

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
11.2-38 TT	6	1420	260	W10	180	1150
11.2-38 TL	6	1420	260	W10	180	1150
14.9-24 TT	6	1265	378	W13	140	1360
14.9-24 TL	6	1265	378	W13	140	1360



DRIVE WHEEL TYRE R-2

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
14.9-24 TT	8	1305	378	W13	180	1600
14.9-28 TT	8	1406	378	W13	180	1700
18.4-30 TT	10	1550	467	W16L	180	2500
18.4-34 TT	10	1655	467	W16L	180	2725
18.4-38 TT	10	1755	467	W16L	180	2900
23.1-26 TT	12	1605	587	DW20	170	3250
23.1-26 TT	16	1605	587	DW20	220	3750
23.1-30 TT	12	1829	610	DW20	170	3450
23.1-30 TT	16	1829	610	DW20	225	4000



SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
15.5/65-18 TL	10	915	395	W13	350	2300
18.00-15.5 TL	10	980	450	13	350	4185



ALL TERRAIN TRACTION TYRE R-2

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
6.50-16 TT	6	813	165	5.00F	250	565
7.50-16 TT	8	889	203	5.50F	210	650
8.3-20 TT	8	940	203	W7	270	970
8.3-24 TT	8	1041	180	W7	270	1135
9.5-24 TT	8	1143	230	W8	310	1420
11.2-24 TT	8	1194	280	W10	210	1465
11-32 TT	10	1448	305	W10	160	1080
12.4-28 TT	8	1320	305	W11	200	1785
13.6-38 TT	10	1700	330	W12	250	2780
16.9-34 TT	10	1651	406	W15L	220	3385



TRENCHER

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
26X12-12 TL	8	648	307	10.50I	140	810
31X15.5-15 TL	8	792	391	13	310	1250



MULT PURPOSE TRUCK (MPT) TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
405/70-20 TL	14	1076	407	13	350	3250
405/70-24 TL	14	1178	407	13	350	3550



FLOTATION IMPLEMENT TYRE

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
400/60-15.5 TL	14	874	400	13	360	2900
550/45-22.5 TL	16	1067	533	16	280	4375
600/50-22.5 TL	16	1170	610	20	260	5150
600/50-22.5 TL	18	1170	610	20	290	5600



FORESTRY TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
28L-26-16 TL	16	1620	715	DW25	210	4750
30.5L-32-18 TL	18	1845	715	DH27	210	5950



INDUSTRIAL TRACTOR TYRES
FRONT TYRES F-3

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
11L-15 TL	10	813	279	8LB	360	1060
11L-16 TL	12	838	279	8LB	440	1250
11L-16 TL	12	838	279	8LB	440	1250
11L-16 TL	12	838	279	8LB	440	1250



BIAS TRACTOR FRONT TYRES F-2 & F2M

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
4.00-12 TT/TL	4	535	110	3.00D	340	250
4.00-19 TT/TL	4	720	110	3.00D	360	325
5.00-15 TT/TL	4	665	140	4J	300	325
5.00-16 TT/TL	6	665	150	4.00E	390	475
5.50-16 TT/TL	8	710	150	4.00E	370	530
6.00-16 TT/TL	8	740	160	4.00E	450	675
6.50-16 TT/TL	8	750	175	4.50E	420	735
7.5L-15 TT/TL	8	745	208	6LB	330	750
7.50L16 TT/TL	8	810	205	5.50F	390	775
7.50-18 TT/TL	8	860	205	5.50F	390	850
7.50-20 TT/TL	8	910	205	5.50F	370	1020
9.5L-15 TT/TL	8	780	240	8LB	330	850
11L-15 TT/TL	8	810	280	8LB	300	950
9.00-16 3RIB TT/TL	8	890	245	W7L	400	1200
10.00-16 3 RIB/4RIB TT/TL	10	910	275	W8L	360	1120
11.00-16 3RIB/4RIB TT/TL	10	970	315	W10L	330	1320



F-2

F-2M

AGRICULTURE TRAILER & VINTAGE
VEHICLE TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
6.50-16 TT	10	760	165	4.50E	410	1010
7.00-16 TT	12	790	176	5.5	410	1335



AGRICULTURAL IMPLEMENT TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
10.8/80-12 TL	8	710	264	9	390	1250
10.0/75-15.3 TL	10	760	264	9	390	1525
11.5/80-15.3 TL	12	865	290	9	410	2145
12.5/80-15.3 TL	14	875	307	9	510	2810
13.0/65-18 TL	14	890	336	11	430	2575
11L-16 TL	12	33	15	8LB	400	1250



FARM SERVICE IMPLEMENT TYRE I-1

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
6.50-16 TT/TL	10	735	173	4.50E	410	920
7.50-16 TT/TL	10	788	122	5.50F	410	1215
9.00-16 TT/TL	10	848	234	6LB	360	1500
10.5/80-18 TT/TL	12	885	276	9	410	1550
760L-15 TT/TL	8	734	193	6LB	360	950
9.5L-14 TT/TL	8	741	241	7LB	300	1090
9.5L-15 TT/TL	8	780	240	8LB	300	1120
11L-14 TT/TL	8	750	280	8LB	250	1120
11L-15 TT/TL	8	810	280	8LB	250	1150
11L-15 TT/TL	12	810	280	8LB	360	1450
11L-16 TT/TL	8	835	280	8LB	250	1215
12.5L-15 TT/TL	12	823	318	10LB	360	1750



INDUSTRIAL TYRES



ECONOMY PLUS⁺

ECONOMY PLUS⁺



ALL TERRAIN TRACTION TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
10.0/75-15.3 TL	10	760	264	9	390	1525
11.5/80-15.3 TL	12	865	290	9	410	2145
15.5/80-24 TL	12	1280	378	W13	300	2900
15.5/80-24 TL	16	1280	378	W13	400	3300



SKID STEER TYRE

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
10-16.5 TL	10	779	261	8.25	520	2135
12-16.5 TL	12	830	312	9.75	550	2865
14-17.5 TL	14	922	351	10.5	550	3875
15-19.5 TL	14	1029	391	11.75	485	4565
11L-16 TL	12	838	279	8	440	1250
10./75-15.3 TL	12	760	264	9	410	1600
10-16.5 TL	12	795	264	8.25	620	2375
12-16.5 TL	14	835	307	9.75	620	3075
10-16.5 TL	12	773	264	8.25	620	2375
12-16.5 TL	14	831	307	9.75	620	3075
10-16.5 TL	12	820	264	8.25	620	2375
12-16.5 TL	14	831	325	9.75	620	3075
10-16.5 TL	10	775	264	8.25	520	2135
12-16.5 TL	12	831	320	9.75	550	2865
23X8.5-12 TL	6	574	213	7.00I	340	820
27X8.5-15 TL	6	678	213	7JA	340	1030
27X10.5-15 TL	6	691	259	8.5	340	1080
10-16.5 TL	12	795	264	8.25	620	2375
12-16.5 TL	14	585	416	7.00I	620	3075
10-16.5 TL	12	773	264	8.25	620	2375
12-16.5 TL	14	835	307	9.75	620	3075
10-16.5 TL	10	779	261	8.25	520	2135
12-16.5 TL	12	830	312	9.75	550	2865

INDUSTRIAL TRACTOR TYRES MPT



SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
10.5/80-18 TL	10	912	274	9	370	1935
12.5/80-18 TL	12	1001	350	9	370	2625
12.5/80-18 TL	12	1001	350	9	370	2625

INDUSTRIAL TRACTOR R-4

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
16.9-24 TL	12	1236	429	DW15	260	3250
16.9-28 TL	12	1435	430	DW15	260	3450
18.4-26 TL	12	1426	467	DW16A	250	3875
18.4-26 TL	16	1426	467	DW16A	300	4000
17.5L-24 TL	12	1241	445	DW15L	260	3000
19.5L-24 TL	12	1314	495	DW17L	230	3450
21L-24 TL	12	1402	533	DW18A	220	3875



INDUSTRIAL TRACTOR TYRE
BACKHOE

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
19.5L-24 TL	12	1314	495	DW17L	230	3455
19.5L-24 TL	12	1314	495	DW17L	230	3455



L-4 MINE



SURE

EXCAVATOR TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
8.25-20 TTF	14	992	245	6.5	675	2060
9.00-20 TTF	14	1030	260	7	700	3000
10.00-20 TTF	16	1062	280	7	810	3000



INDUSTRIAL & LIFT TRUCK TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
4.00-8 TTF	8	422	108	2.50C	960	690
5.00-8 TTF	10	469	131	3.00D	1000	1290
6.00-9 TTF	10	540	160	4.00E	860	1680
6.50-10 TTF	12	590	178	5.00F	970	2170
7.00-9 TTF	10	590	190	5.00S	850	1865
7.00-12 TTF	12	676	192	5.00s	860	2720
7.00-15 (29X8-15) TTF	12	760	199	5.5	860	3150
7.50-15 TTF	12	798	215	6.00G	790	3490
8.15-15 (28X9-15) TTF	14	684	221	7.00BD	930	4255
8.25-12 TTF	12	728	210	5.00S	695	2000
8.25-15 TTF	14	834	236	6.5	720	3935
10.00-20 TTF	16	1055	278	7.5	790	6765
12.00-20 TTF	20	1125	315	8.5	965	8970




OFF THE ROAD TYRE



ECONOMY PLUS⁺

ECONOMY PLUS⁺

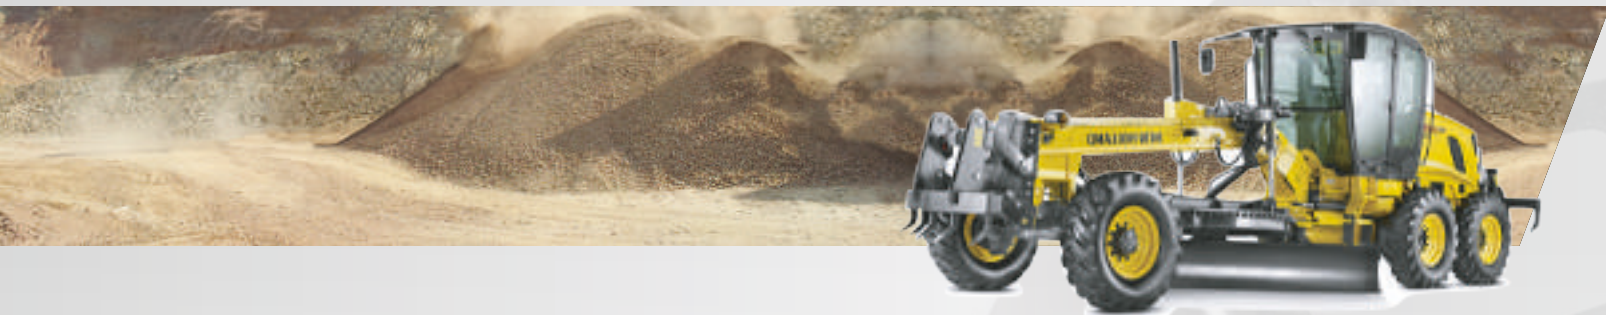

GRADER (G-2) TYRES

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
13.00-24 TL	12	1280	330	8.00TQ	300	2725
13.00-24 TL	16	1280	220	8.00TQ	325	3075
14.00-24 TL	12	1350	360	8.00TQ	250	3075
14.00-24 TL	16	1350	360	8.00TQ	350	3650
15.5-25 TL	12	1275	395	12.00/13	250	2650
17.5-25 TL	12	1350	445	14.00/1.5	200	2900
17.5-25 TL	16	1350	445	14.00/1.5	280	3350
17.5-25 TL	20	1350	445	14.00/1.5	305	3650
20.5-25 TL	16	1490	520	17.00/2.0	225	4000
23.5-25 TL	16	1615	595	19.00/2.5	200	4750



SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
15.5-25 TL	12	1275	395	12.00/13	250	2650
17.5-25 TL	12	1350	445	14.00/1.5	200	2900
17.5-25 TL	16	1350	445	14.00/1.5	280	3350
17.5-25 TL	20	1350	445	14.00/1.5	305	3650
20.5-25 TL	16	1490	520	17.00/2.0	225	4000



SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
14.00-24 TL	12	1350	360	9.00DC	250	3075
14.00-24 TL	16	1350	360	9.00DC	350	3650



EARTH MOVER TYRES E-3/L-3

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
15.5/65-18 TL	10	915	395	W13	350	2300
18.00-15.5 TL	10	980	450	13	350	4185



E-3/L-3

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
17.5-25 TL/TT	16	1350	445	14.00/1.5	300	4250
20.5-25 TL/TT	20	1490	520	17.00/2.0	325	6000
23.5-25 TL/TT	20	1615	595	19.00/2.5	300	7300
26.5-25 TL/TT	28	1743	645	22.00/3.0	350	10000



L-5

SIZE	PLY	OVERALL DIAMETER (MM)	SECTION WIDTH MM	STANDARD RIM	PRESSURE KPA	MAX LOADING KG
17.5-25 TL/TT	16	1340	420	14.00/1.5	475	7300
20.5-25 TL/TT	20	1479	500	17.00/2.0	450	9500
23.5-25 TL/TT	20	1588	568	19.00/2.5	375	10900
26.5-25 TL/TT	28	1758	643	22.00/3.0	475	15500
29.5-25 TL/TT	28	1868	718	25.00/3.5	425	17500



SOLID TYRES



ECONOMY PLUS⁺

ECONOMY PLUS⁺

SOLID TYRE

MAX LOADING LIFT TRUCK (KG)										OTHER INDUSTRIAL
SIZE	OVERALL DIAMETER MM	SECTION WIDTH MM	STANDARD RIM	10 KM/H		16 KM/H		25 KM/H		16 KM/H
				LOAD	ROTATION	LOAD	ROTATION	LOAD	ROTATION	
5.00-8	469	126	3	1210	970	1175	880	1095	820	840
6.00-9	545	140	4	1920	1535	1855	1390	1730	1295	1325
6.50-10	597	157	5	2640	2110	2545	1910	2370	1780	1820
7.00-9	578	170	5	2730	2015	2605	1925	2530	1790	1940
7.00-12	683	168	5	3015	2410	2910	2185	2710	2035	2075
7.00-15	759	178	5.5	3590	2870	3465	2600	3225	2420	2475
8.25-12	735	206	5	3325	2660	3215	2410	2995	2245	2295
8.25-15	847	205	6.5	4940	3950	4765	3575	4440	3330	3405
16X6-8	418	156	4.33	1500	1200	1445	1085	1345	1010	1035
18X7-8	457	165	4.33	2350	1880	2265	1700	2110	1585	1620
21X8-9	535	189	6	2810	2250	2715	2035	2530	1895	1940
23X9-10	200	595	6.5	3420	2735	3300	2475	3076	2305	2355
27X10-12	683	236	8	4465	3570	4315	3235	4020	3015	3080
28X9-15	700	230	7	4090	3270	3945	2960	3675	2755	2820
250-15	734	226	7	4675	3740	4515	3385	4250	3155	3225

SOLID TYRE

MAX LOADING LIFT TRUCK (KG)						OTHER INDUSTRIAL
		10 KM/H		16 KM/H		16KM/H
SIZE	MM	LOAD	ROTATION	LOAD	ROTATION	
10-5X6 1/2	254X127X165.1	940	850	910.00	840	730
14X4 1/2X8	356X114X203.2	1090	965	1040.00	960	960
15 1/2X6X10	394X152X254	1735	1540	1660.00	1535	1335
16X5X10 1/2	406X127X266.7	1400	1250	1340.00	1240	1080
16X6X10 1/2	406X152X266.7	1780	1580	1700.00	1570	1370
16 1/4X5X11 1/4	413X127X285.8	1415	1260	1350.00	1250	1090
16 1/4X6X11 1/4	413X152X285.8	1780	1580	1710.00	1580	1370
18X6X12 1/8	457X152X308	1950	1740	1860.00	1720	1500
18X7X12 1/8	457X178X308	2370	2110	2270.00	2100	1820
18X8X12 1/8	457X203X308	2790	2480	2670.00	2470	2150
21X6X15	533X152X381	2280	2020	2160.00	2000	1740
21X7X15	533X178X381	2670	2380	2550.00	2360	2050
21X8X15	533X203X381	3110	2795	3000.00	2780	2420
22X12X16	599X305X406.4	5235	4660	5000.00	4630	4030
22X9X16	559X229X406.4	3750	3340	3590.00	3320	2890
9X5X5	229X127X127	890	790	850.00	785	680

